


SPECIFICATION SUBMITTAL

Project: _____
 Architect/Engineer: _____
 Builder/Developer: _____
 Plumbing Contractor: _____



FlowTite® R-SERIES®

COMPRESSION VALVE REPLACEMENT

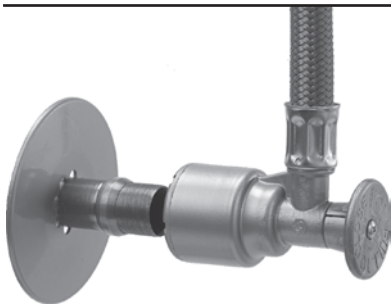

Unique **PUSHON**® design - Nests directly over old brass ferrule simplifying replacement, reducing cost and eliminating in-wall pipe repairs. It can also be used on a pipe without ferrule.

FlowTite® R-SERIES® Brushed Chrome Supply Stop Valve / Factory Attached One-Piece Double Layer Flexible Reinforced Braided Connector System

For Copper and CPVC pipe only

Model Number	Description
<input type="checkbox"/> P05S-3,2 (R)	1/2" nom. supply stop valves with 3/8" or 1/4" O.D. comp.
<input type="checkbox"/> P05LS-5,3 (R-CR-RL)	With Flexible Braided connector for Faucets and Dishwashers.
<input type="checkbox"/> P05CS-7 (R)	With Flexible Braided connector for Toilets.
<input type="checkbox"/> P05IS-2 (R)	With Flexible Braided connector for Ice makers.

Design Features / Benefits


- 10 year limited warranty including labor and material for residential and one year for commercial.
 - Property owner protection.
 - Reduced maintenance costs.
- **PUSHON** over existing ferrule.
 - Saves time and reduces labor cost
 - Eliminates expensive in-the-wall repairs and ferrule pullers that damage pipe.
- Designed to be pushed onto copper and CPVC pipe with or without a brass compression ferrule.
 - Versatile application
 - Replaces compression, solder and glue-on valves and can be installed on new pipe.
 - Single solution for non-warranted valve replacement across property.
- Tested to 1,000 psi.
 - 10:1 margin of safety.
- Over 35 million **PUSHON** technology valve installations in over 2.5 million U.S. homes since 1988.
 - Long-term proven technology performance.
- Easy Pull/Push ON/OFF Handle.
 - No sticking or leaking turn handles due to dried out rubber packing.
- Original one-piece factory attached connector.
 - Reduced maintenance costs.
 - Eliminates potential leaks at joints.
- 100% non-metallic water contact.
 - No lead, no internal corrosion, no brass dezincification.
- NSF certified.
 - Health Safe.
- Clean look.
 - To fit any interior.
- Removable and Reusable.
 - Installation does not damage pipe.

Listings:

NSF/ANSI 61
 IAPMO File 2657 (cUPC/IPC/NPC of Canada)
 IAPMO File 6518 (Lead Free)

Manufactured in accordance with:

NSF/ANSI 61 Section 9 Certified
 ASME A112.18.1/CSA B125.1
 Section 1417(d) US SDWA and NSF/ANSI 372

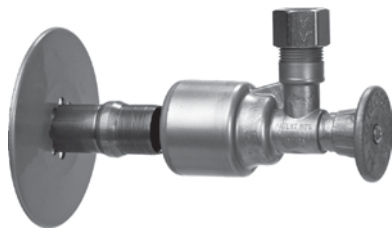

P05S-R



1/2" IPS



7/8" Ballcock



3/8" Comp. Adapter (w/ nut)



1/4" Comp.



3/8" Comp. Adapter (w/o nut)



3/8" Brass Elbow



3/8" x 3/4" Whirlpool Elbow