


# SPECIFICATION SUBMITTAL

Project: \_\_\_\_\_  
 Architect/Engineer: \_\_\_\_\_  
 Builder/Developer: \_\_\_\_\_  
 Plumbing Contractor: \_\_\_\_\_




FOR PEX, COPPER & CPVC



**One Valve Fits ALL**

## PUSHON® PEX - Brushed Chrome Supply Stop Valve / Factory Attached One-Piece Double Layer Flexible Reinforced Braided Connector System

- For Copper, CPVC and PEX Pipe

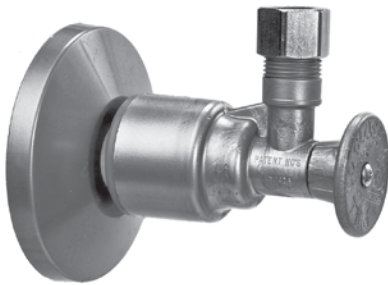

**P05-XF**



1/2" IPS



7/8" Ballcock



3/8" Comp. Adapter (w/ nut)



1/4" Comp.



3/8" Comp. Adapter (w/o nut)



3/8" Brass Elbow



3/8" x 3/4" Whirlpool Elbow

Model Number	Description
<input type="checkbox"/> P05S-3,2 (XF-XC)	Valve-Only: 1/2" Nominal Supply Stop Valves With 3/8" or 1/4" O.D. Compression Nut.
<input type="checkbox"/> P05LS-5,3 (XP-XF-XC-XL-XE)	One-Piece: Factory Attached Flexible Braided Connector for Faucets and Dishwashers.
<input type="checkbox"/> P05CS-7 (XF)	One-Piece: Factory Attached Flexible Braided Connector for Toilets.
<input type="checkbox"/> P05IS-2 (F-T)	One-Piece: Factory Attached Flexible Braided Connector for Ice Makers.

### Design Features / Benefits

- 10 year limited warranty including labor and material for residential and one year for commercial.
  - Property owner protection.
  - Reduced maintenance costs.
- Tested to 1,000 psi.
  - 10:1 margin of safety.
- Over 35 million PUSHON technology valve installations in over 2.5 million new U.S. homes since 1988.
  - Long-term proven technology performance.
- Easy Pull/Push ON/OFF Handle.
  - No sticking or leaking turn handles due to dried out rubber packing.
- Original one-piece factory attached connector.
  - Reduced maintenance costs.
  - Eliminates potential leaks at joints.
- 100% non-metallic water contact.
  - No lead, no internal corrosion, no brass dezincification.
- NSF certified.
  - Health Safe.
- Clean look.
  - To fit any interior.
- Removable and Reusable.
  - Installation does not damage pipe.

### Listings:

NSF/ANSI 61  
 IAPMO File 2657 (cUPC/IPC/NPC of Canada)  
 IAPMO File 6518 (Lead Free)

### Manufactured in accordance with:

NSF/ANSI 61 Section 9 Certified  
 ASME A112.18.1/CSA B125.1  
 Section 1417(d) US SDWA and NSF/ANSI 372